


Dimensions

Bore diameter 400 mm

Outside diameter 560 mm

Width 205 mm

Product net weight 161 kg

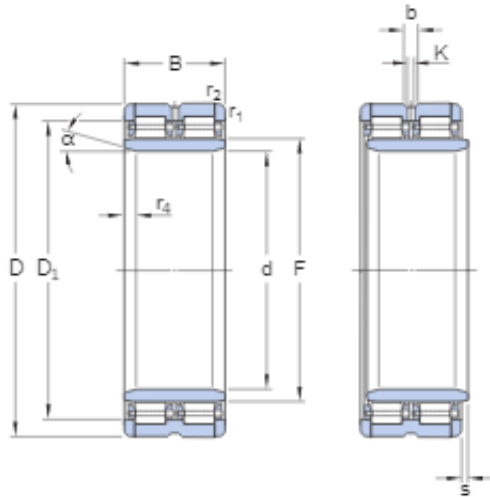

Basic dynamic load rating 3 140 kN

Basic static load rating 7 800 kN

Reference speed 800 r/min

Limiting speed 1 200 r/min

d	
400 mm Bore diameter	
D	
560 mm Outside diameter	
B	
205 mm Overall bearing width	
D1	
509 mm Shoulder diameter outer ring	
F	
445 mm Raceway diameter inner ring	
b	
16.7 mm Width of annular groove	
K	
9 mm Diameter lubrication hole	
r1,2	
min.2 mm Chamfer dimension outer ring	
r3,4	
min.13.6 mm Chamfer dimension inner ring	
?	
20 ° Chamfer angle inner ring	
s	
max.2.7 mm Permissible axial displacement from the normal position of one bearing ring relative to the other	