


Dimensions

Bore diameter 400 mm

Outside diameter 600.19 mm

Width 200 mm

Product net weight 203 kg

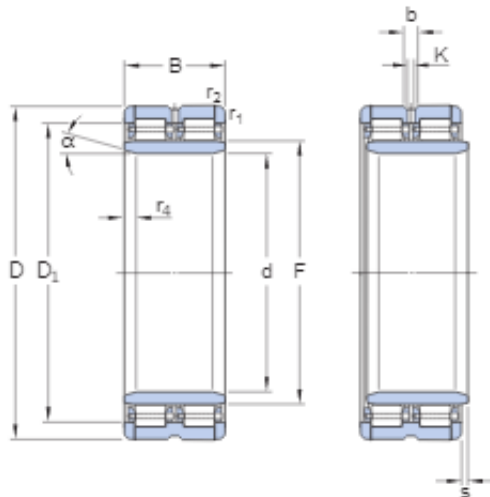

Basic dynamic load rating 3 470 kN

Basic static load rating 7 200 kN

Reference speed 750 r/min

Limiting speed 1 100 r/min

d
400 mm Bore diameter
 D
600.19 mm Outside diameter
 B
200 mm Overall bearing width
 d_1
468 mm Shoulder diameter inner ring
 E
557 mm Raceway diameter outer ring
 b
16.7 mm Width of annular groove
 K
9 mm Diameter lubrication hole
 $r_{1,2}$
min.5 mm Chamfer dimension inner ring
 $r_{3,4}$
min.5 mm Chamfer dimension outer ring
 s
max.4.5 mm Permissible axial displacement from the normal position of one bearing ring relative to the other

